


SECTION A-A
N.T.S.

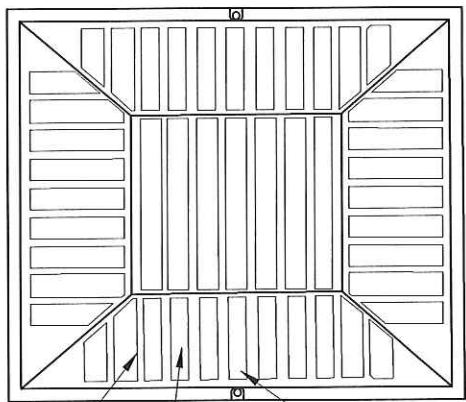

ALL BARS 5/8"
ALL SLOTS 1"
SLOT FOR LOCKING BOLT

PLAN
N.T.S.

NOTES:

1. FRAME AND GRATE SHALL BE LOCKING AND GRATE SHALL BE BOLTED TO FRAME. FRAME SHALL CONFORM TO WSDOT STANDARD PLAN B-30.10-01.
2. OVERFLOW STRUCTURE SHALL BE LOCATED WITHIN 10 FEET OF ROAD EDGE FOR MAINTENANCE ACCESS, UNLESS APPROVED OTHERWISE. OVERFLOW STRUCTURE MAY BE LOCATED IN SIDE SLOPES.
3. FRAME AND GRATE TO CONFORM TO WSDOT STANDARD SPECIFICATIONS 9-05.15(2).
4. SPACE PLANTS WITHIN FACILITY TO ALLOW MAINTENANCE ACCESS TO STRUCTURE.



BEEHIVE OUTLET STRUCTURE

STANDARD PLAN:
SD-090 LID

DATE: JUNE 2017

CITY ENGINEER APPROVAL: