



NOTES:

1. TRENCH DRAINS SHALL BE SPACED FOR THE VOLUME OF WATER CONVEYED INTO THE FACILITY, IN ORDER TO MEET FLOW SPREAD CRITERIA AND FULL STORMWATER CAPTURE.
2. TRENCH GRATE SHALL BE A DECORATIVE DESIGN OF IRON OR ALUMINUM AND CONFORM TO ADA STANDARDS.
3. INSTALL TRENCH GRATE PER MANUFACTURER INSTRUCTIONS. USE FRAME SPECIFIED BY MANUFACTURER.

ISOMETRIC
N.T.S.

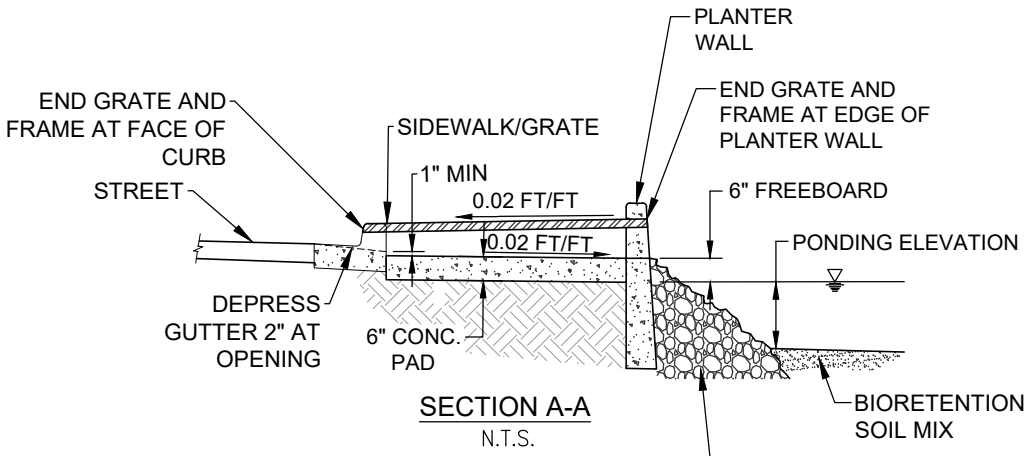

SECTION A-A
N.T.S.

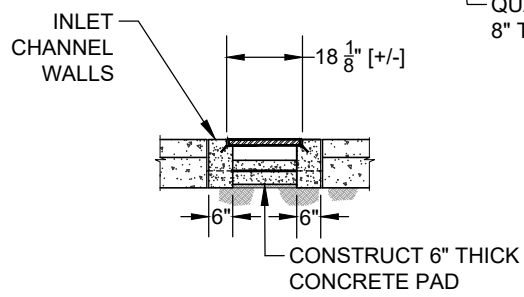

SECTION B-B
N.T.S.

N.T.S.



TRENCH DRAIN TO BIORETENTION FACILITY

CITY OF KELSO
DEPARTMENT OF
COMMUNITY DEVELOPMENT
& ENGINEERING

CITY ENGINEER APPROVAL: Michael Kardas, P.E.

x *[Signature]*

STANDARD PLAN NO.
KSD-090-21
LID
DATE:
MAY 2021