




DRAWN BY: FERN LIDDELL

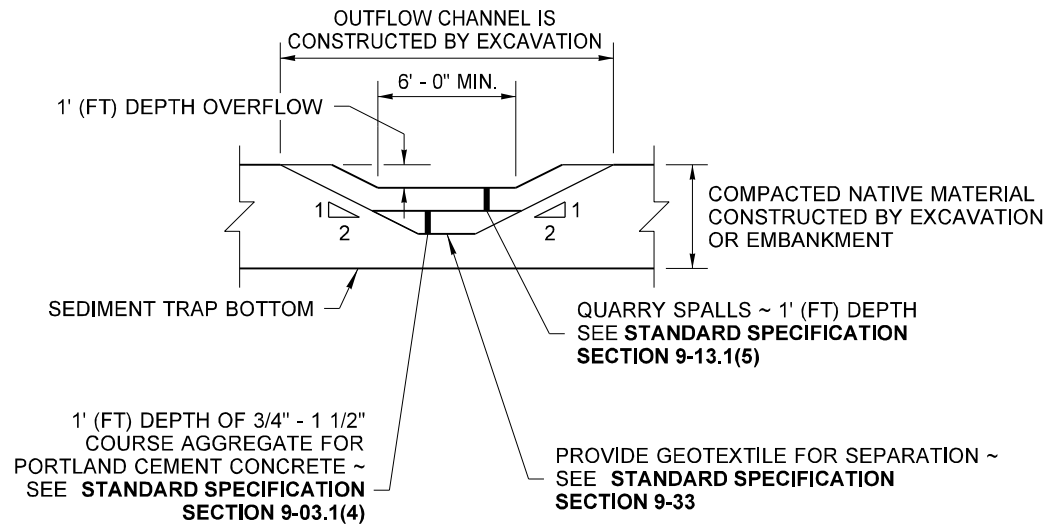

SECTION A

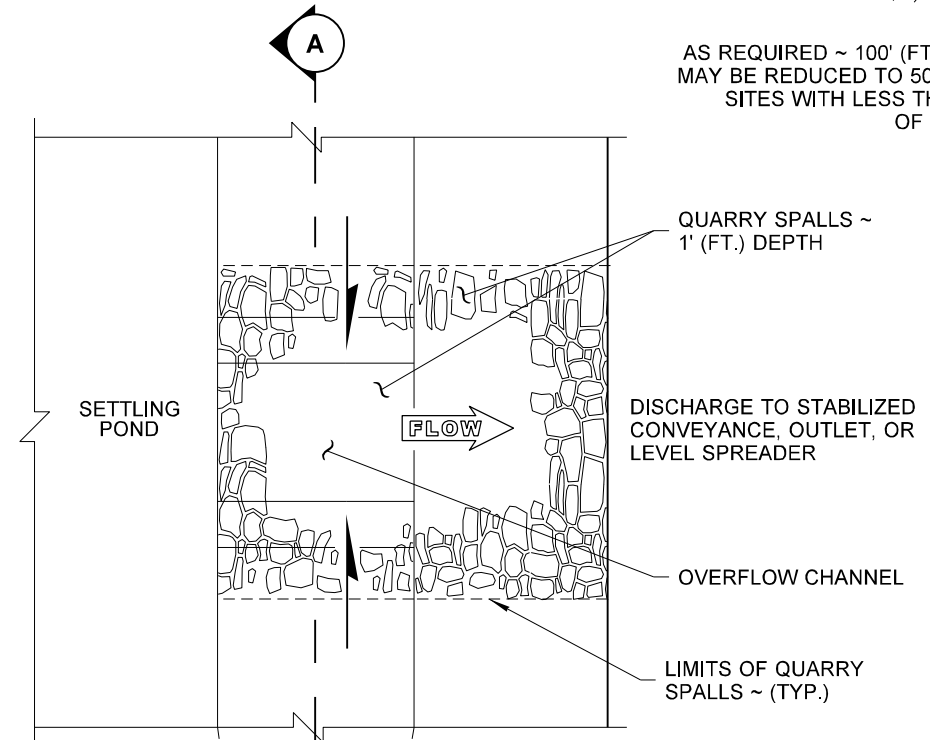


PARTIAL PLAN VIEW OF BERM
SHOWN LARGER FOR CLARITY

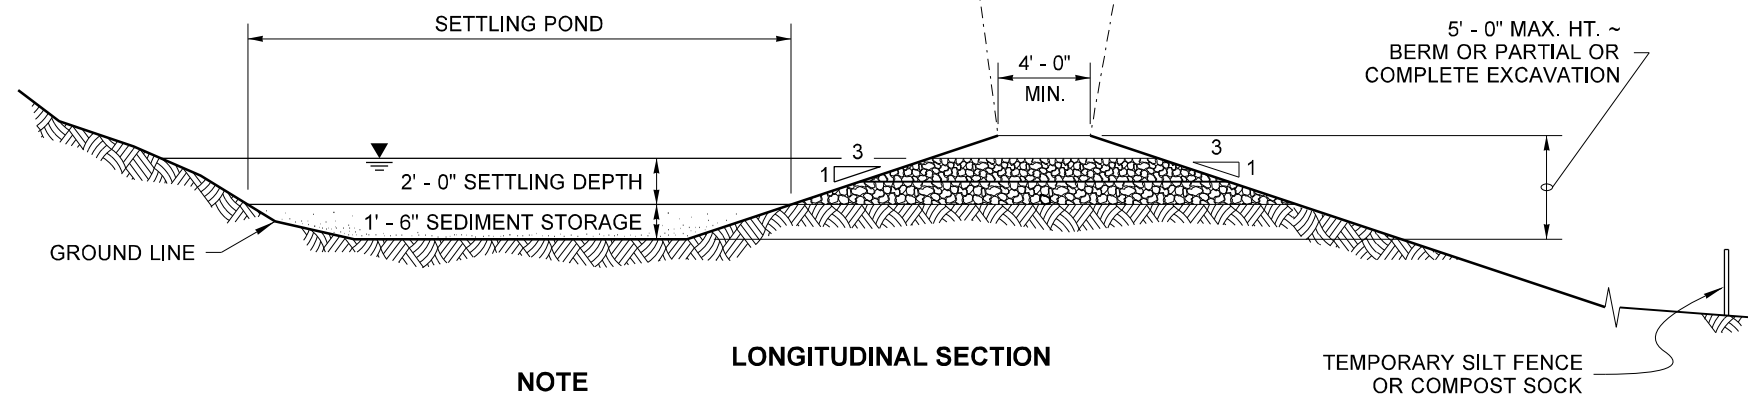

LONGITUDINAL SECTION


NOTE
PLACE GEOTEXTILE UNDER THE SPILLWAY AND SIDE SLOPES. PROVIDE A CONTINUOUS LAYER BETWEEN THE GRAVEL/ROCK AND THE NATIVE EARTHEN MATERIAL.

TEMPORARY SEDIMENT TRAP

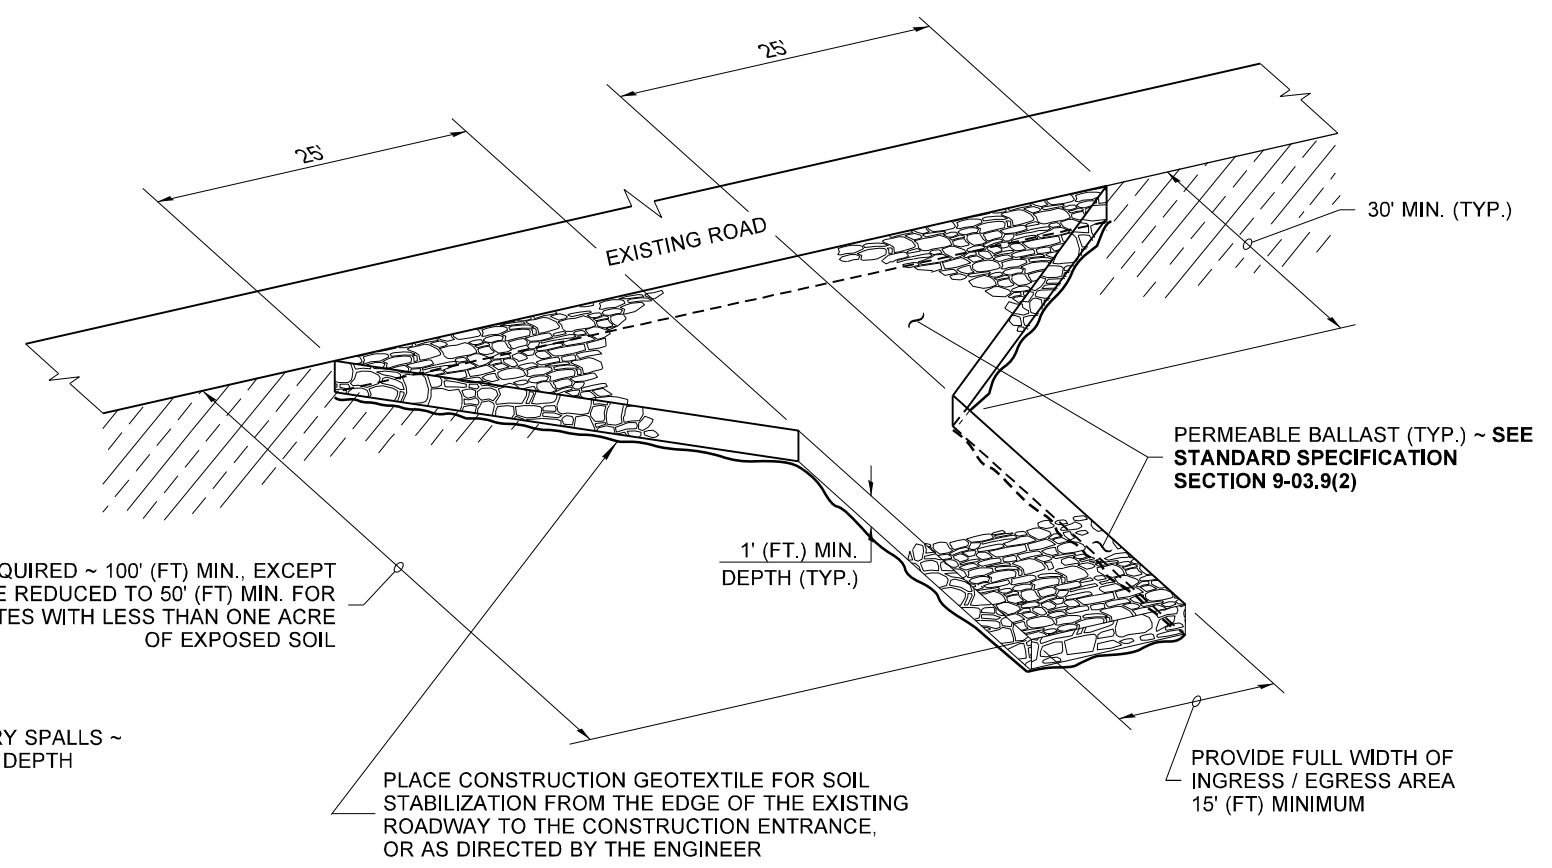

ISOMETRIC VIEW
STABILIZED CONSTRUCTION ENTRANCE

STABILIZED CONSTRUCTION ENTRANCE SHALL MEET THE REQUIREMENTS OF STANDARD SPECIFICATION SECTION 8-01.3(7).

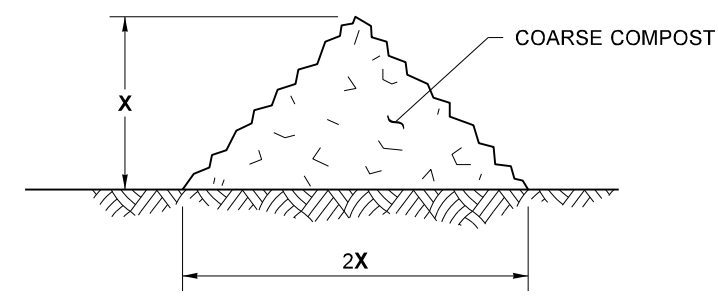

X = 1' - 0" FOR SLOPES 4H:1V OR FLATTER
X = 1' - 6" FOR SLOPES STEEPER THAN 4H:1V

TYPICAL SECTION
COMPOST BERM DETAIL



STATE OF WASHINGTON
REGISTERED
LANDSCAPE ARCHITECT
Hartwig, Juli
JULI DEE HARTWIG
LICENSE NO. 1422
DATE: 06-21-17

**MISCELLANEOUS
EROSION CONTROL DETAILS
STANDARD PLAN I-80.10-02**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION
Carpenter, Jeff
Carpenter, Jeff
Jul 15 2016 2:28 PM
STATE DESIGN ENGINEER
Washington State Department of Transportation