




# SUBMITTAL INFORMATION

## Iron Service Saddles - (FS202-xxx-xxx style)

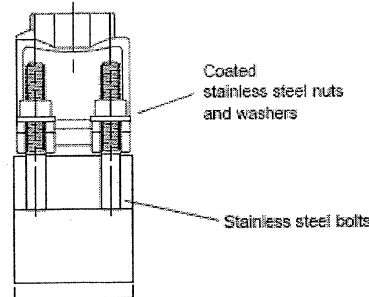

### FS202 DOUBLE BAND IRON SERVICE SADDLES

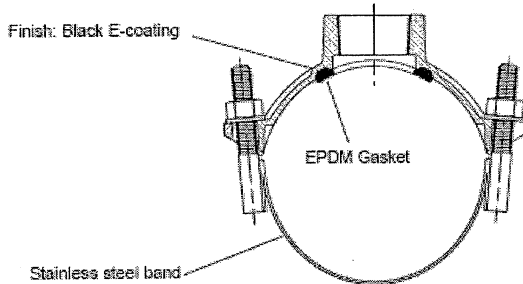

NOM. PIPE SIZE	O.D. RANGE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	*2.35 - 2.50	2.8	▼ FS202-250-Tap	
2-1/2"	*2.75 - 2.90	2.8	▼ FS202-290-Tap	
3"	**3.46 - 3.80	4.8	▼ FS202-380-Tap	
	**3.80 - 4.25	5.5	▼ FS202-425-Tap	
4"	**4.26 - 4.73	5.4	▼ FS202-473-Tap	
	***4.50 - 4.80	5.4	▼ FS202-480-Tap	
6"	4.74 - 5.26	5.4	▼ FS202-526-Tap	
	5.94 - 6.69	6.5	▼ FS202-669-Tap	
	6.63 - 6.90	6.5	▼ FS202-690-Tap	
8"	6.84 - 7.60	6.8	▼ FS202-760-Tap	
	7.93 - 8.71	7.4	▼ FS202-871-Tap	
	***8.63 - 9.05	7.4	▼ FS202-905-Tap	
10"	8.99 - 9.79	8.2	▼ FS202-979-Tap	
	10.00 - 10.75	10.4	▼ FS202-1075-Tap	
	10.75 - 11.10	11.5	▼ FS202-1110-Tap	
12"	11.10 - 12.12	11.5	▼ FS202-1212-Tap	
	12.00 - 12.75	12.5	▼ FS202-1275-Tap	
	***12.75 - 13.20	12.5	▼ FS202-1320-Tap	
14"	13.20 - 14.38	12.5	▼ FS202-1438-Tap	
	15.30 - 16.25	16.0	▼ FS202-1625-Tap	
	16.30 - 17.25	16.5	▼ FS202-1725-Tap	
16"	17.40 - 18.40	17.0	▼ FS202-1840-Tap	
	18.50 - 19.25	17.3	▼ FS202-1925-Tap	
18"	19.50 - 20.50	20.8	▼ FS202-2050-Tap	
20"	21.20 - 22.20	21.3	▼ FS202-2220-Tap	
24"	22.50 - 23.50	24.0	▼ FS202-2350-Tap	
	23.80 - 24.80	24.5	▼ FS202-2480-Tap	
30"	25.60 - 26.50	31.7	▼ FS202-2650-Tap	
	31.74 - 32.74	42.0	▼ FS202-3274-Tap	

3-1/4" (3/4" and 1" taps)  
 4" (1-1/4" and 2" taps)  
 5" (1/4" and 3/8" saddles, all tap sizes)

\* Saddles for this pipe range are available with 3/4" and 1" taps only.

\*\* Saddles with this pipe range are not available with 2" CC or 2-1/2" IP taps.

\*\*\* These saddles with 1-1/2" through 2" taps fit the top end of the listed range only.

\*\*\*\* This saddle with 2" CC (CC7) or 2-1/2" IP (IP8) fits 9.05 O.D. only.

#### OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

▼ UL Classified to ANSI/NSF Standard 61.

#### FEATURES

- Body made of high strength ductile iron per ASTM A536
- Double Wide Band and 5/8" UNC threaded bolts of 18-8 type 304 stainless steel. 1/2" bolts are furnished on saddles 3" and smaller.
- Gasket is EPDM rubber, ASTM-D2000
- Finish on saddle body is black E-coating.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
<http://www.fordmeterbox.com>

11/29/07

Submitted By:

## SUBMITTAL PROCEDURES (19 OF 28)

STANDARD PLAN:  
**PN - 028 - L**

CITY ENGINEER APPROVAL:

DATE: **FEB. 2008**

Longview: **C.B.**

Kelso: